


3197 Montecarlo LED with bracket – cycle lanes


Housing/Frame: in die-cast aluminium. With aluminium bracket (pole connection $\varnothing 60$).
 Diffuser: tempered glass, 5 mm thick, thermal shock and impact resistant (UNI EN 12150-1/2001 tests).
 Coating: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.
 Standard supply: in case of maintenance, the upper housing remains open through brackets that prevent accidental closing.
 Standard quick connector for electrical connection.
 device for automatic temperature control. In the event of an unexpected LED temperature rise caused by particular weather conditions or a LED failure, the system will reduce the luminous flux to lower the working temperature and guarantee proper operation. Standard knife switch.
 The total return of the equipment is close to 100%. Each LED module is equipped with a lens with high efficiency 130°x70° lenses
 LED: Latest generation LED technology, Ta-30+40°C life 80%: 80.000h (L80B20).
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

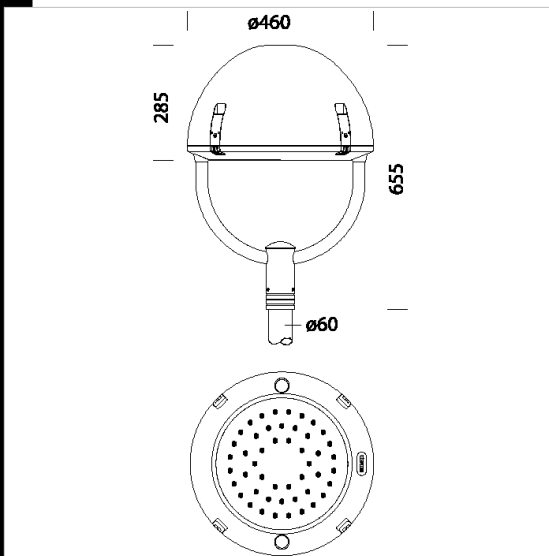

Download
 DXF 2D
 - 3197.dxf
 3DS
 - disano_3197_montecarlo.3ds
 3DM
 - disano_3197_montecarlo.3dm
 Montaggi
 - montecarlo_forcella.pdf

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
326750-00	CLD CELL	9.91	LED-4898lm-4000K-CRI>70	43 W	GREY9007/GRAF.

Posts

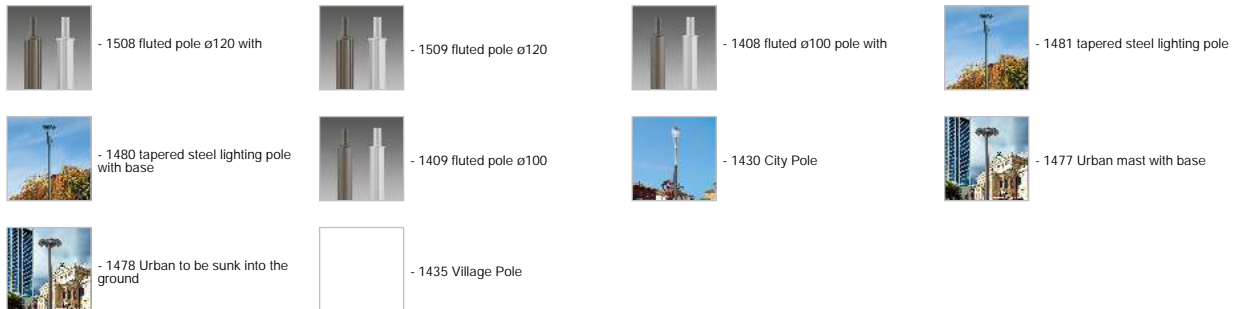

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated