


1420 pole with base

Pole in hot galvanized steel, thermosetting polystyrene powder coating. Base, inspection window and decorations in pressed die-cast aluminium and painted. Supplied with inspection window, 2 protection fuse holders, 2 fuses (16A), removable terminal block. Stainless steel screws.

NOTE: Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed

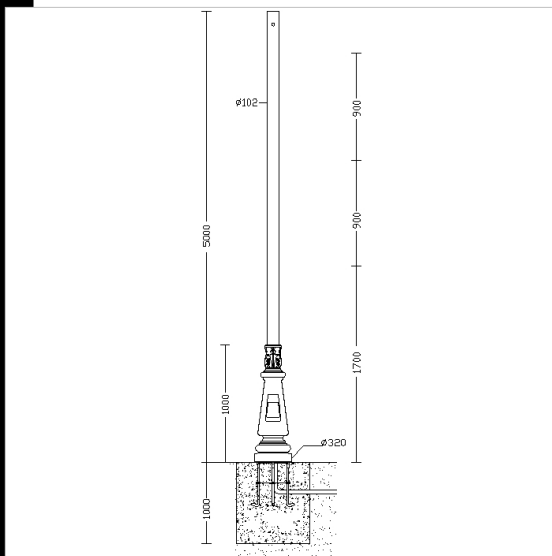


Download

- DXF 2D
 - 1420.dxf
- 3DS
 - disano_1420_lucerna_4mt.3ds
 - disano_1420_lucerna_5mt_simple.3ds
 - disano_1420_lucerna_5mt.3ds
 - disano_1420_lucerna_4mt_simple.3ds
- 3DM
 - disano_1420_lucerna_4mt_simple.3d
 - disano_1420_lucerna_4mt.3dm
 - disano_1420_lucerna_5mt_simple.3d
 - disano_1420_lucerna_5mt.3dm
- Montaggi
 - 1410-1411-1420-1421 03-11.pdf
 - 1420base.dxf

Code	Kg	Colour	Dimension	Aboveground	Underground
425321-00	0.00	ANTHRACITE	5000x0x0 Ø0	5000	0
425320-00	0.00	ANTHRACITE	4000x0x0 Ø0	4000	0
425320-00000583	0.00	ANTHRACITE	4000x0x0 Ø0	4000	0
425321-00000583	0.00	ANTHRACITE	5000x0x0 Ø0	5000	0

Accessories

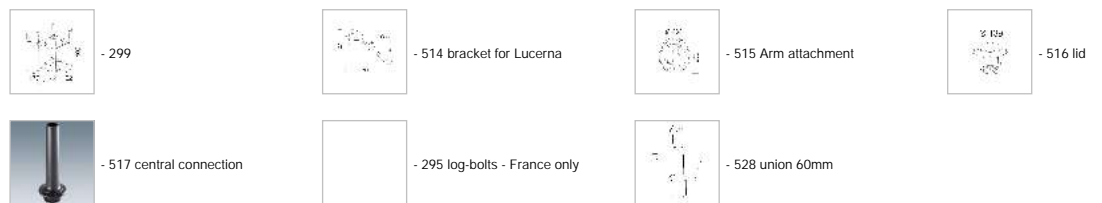

Products



The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated