


1233 Faro - short version



Housing: In extruded aluminium, cylindrical section, Ø 180.
 Diffuser: In vandal resistant and V2 self-extinguishing opal polycarbonate, UV-stabilized.
 Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cathaphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.
 Lampholder: In white polycarbonate, with phosphor bronze contacts (FLC), socket 2G11. In ceramics with silver-plated contacts. Socket E27.
 Electric gear: 230-240V/50Hz power supply. Hard wire, 0.50 sqmm cross-section, PVC-HT sheath resistant up to 90°C, according to CEI 20-20 standard, or silicone flexible wire terminated with quick-connect clamps in admiralty brass, glass braid, 1.0 sqmm cross-section. 2P+T terminal block, maximum allowed lead cross-section of 4 sqmm.
 Standard supply: With base and anchor bolts to bury. Supplied with socket-pin connector for quick installation and air recycle valve.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK10 degree of protection in compliance with EN 60529 standards. They have obtained ENEC European Certificate of Conformity.
 Non-polluting louvre, ideal for installation in zone 3 (UNI10819).

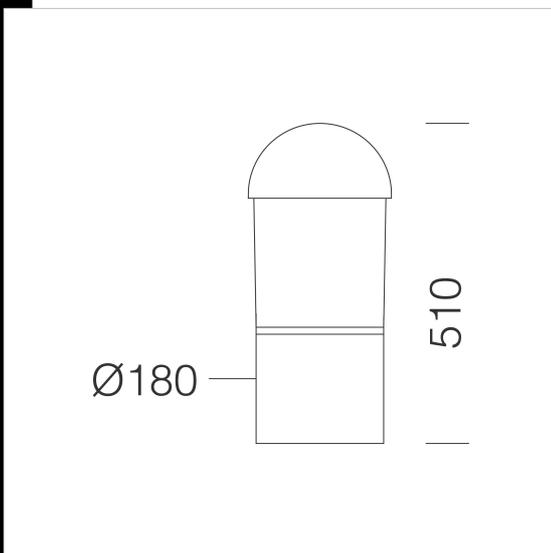

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
510303-00	S	3.66	MAX 75---	0 W	E27	GRAPHITE
510305-00	CNR-L	4.75	JM-E 70-4700lm-4000K-Ra 1b	82 W	E27	GREY9007
510336-00	CNR-L	3.70	JM-E 70-4700lm-4000K-Ra 1b	82 W	E27	GRAPHITE
510304-00	S	3.40	MAX 75---	0 W	E27	GREY9007
510307-08	CELL	5.70	FLC 2x18L-1200lm-4000K-Ra 1b	38 W	2G11	GREY9007
510339-08	CELL	3.70	FLC 2x18L-1200lm-4000K-Ra 1b	38 W	2G11	GRAPHITE



Download
 DXF 2D
 - 1233c.dxf
 3DS
 - disano_1233_faro.3ds
 3DM
 - disano_1233_faro.3dm
 Montaggi
 - faro_faro3_faro4_tn.pdf
 - 1233.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated