


Download

- DXF 2D
- 1797x.dxf
- 3DS
- disano_1797_faro_5_3ds
- 3DM
- disano_1797_faro_5_3dm
- Montaggi
- faro-4-5 07-20.pdf
- BIM
- 1797_Faro 5 LED - high version - 20200528.zip

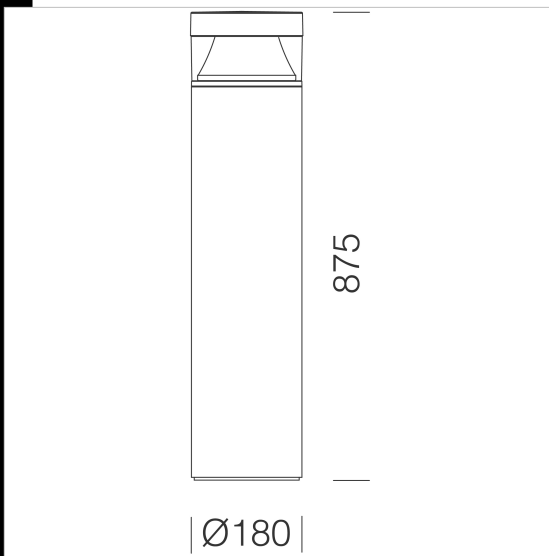

1797 Faro 5 LED - high version

Housing: In extruded aluminium, cylindrical section, Ø 180.
 Diffuser: In vandal resistant and V2 self-extinguishing clear polycarbonate, UV-stabilized.
 Painting: the standard liquid immersion coating consists of a first metal surface pre-treatment stage, a successive epoxy cataphoresis corrosion and salt resistant coating, and a final layer of bi-component acrylic liquid UV-stabilised coating.
 Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP65IK10 degree of protection in compliance with EN 60529 standards.
 Standard supply: with air recycle valve. Supplied with socket-pin connector for quick installation
 Working life: 80%: 50000h (L80B20) (from -30° to +50° C - Tj=25°C).

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
510630-00	CLD	5.64	LED-775lm-4000K-CRI 80	7 W	GRAPHITE
510631-00	CLD	5.68	LED-1500lm-4000K-CRI 80	14 W	GRAPHITE
510630-39	CLD	5.64	LED-720lm-3000K-CRI 80	8 W	GRAPHITE
510631-39	CLD	5.70	LED-1860lm-3000K-CRI 80	14 W	GRAPHITE
510632-00	CLD	5.64	LED-2000lm-4000K-CRI 80	19 W	GRAPHITE
510632-39	CLD	5.64	LED-1860lm-3000K-CRI 80	19 W	GRAPHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated